

# Livinglass<sup>®</sup>

## **SECTION 08 81 13 DECORATIVE GLASS GLAZING**

### **Part 1 GENERAL**

#### 1.1 Summary

A. Section Includes: Laminated glass with Film interlayer.

B. Related Sections:

1. Section 09770 – Special Wall Surfaces
2. Section 07 90 00 – Joint Protection
3. Section 08 11 00 – Metal Doors and Frames
4. Section 08 30 00 – Specialty Doors and Frames
5. Section 08 41 00 – Entrances and Storefronts
6. Section 08 81 00 – Glass Glazing
7. Section 08 44 00 – Curtain Wall and Glazed Assemblies

#### 1.2 References

A. ASTM International

1. ASTM C 1036 Specification for Flat Glass
2. ASTM C 1048 Specification for Heat-Treated Flat Glass-Kind HS, Kind FT Coated and Uncoated Glass
3. ASTM C 1172 Specification for Laminated Architectural Flat Glass
4. ASTM E-774-Specification for Sealed Insulating Glass Units where insulating glass is specified

B. ANSI - American National Standards Institute

1. ANSI Z-97.1 Safety Performance Specifications and Methods of Test Used in Buildings
2. CPSC 16 CFR 1201 Safety Standard for Architectural Glazing Materials, Category I and II

# Livinglass<sup>®</sup>

## Part 2 PRODUCT

### 2.1 Manufacturer

A. Livinglass, Inc.  
T: 949.369.1139  
F: 800.846.0245  
email: [info@livinglass.com](mailto:info@livinglass.com)  
website: [www.livinglass.com](http://www.livinglass.com)

### 2.2 Livinglass Light Lavawood

#### A. Material

1. Configuration: **View Single-sided or Double-sided**
2. Pattern: **Lavawood (Glacier, Snow, Night or Day)**
3. Processing: **polished edges, holes per provided drawings**
4. Overall Nominal Thickness: **.465" Single-sided, .525" Double-sided**

#### Associated Components

##### A. Top Lite

1. Type: **Tempered**
2. Thickness: **5.0 mm**
3. Class: **Clear or Starphire**



##### B. Bottom Lite

1. Type: **Tempered**
2. Thickness: **5.0 mm**
3. Class: **Clear or Starphire**

##### C. Interlayer

1. Design: **Manufactured by Livinglass**
2. Thickness: **.020" per layer**

# Livinglass<sup>®</sup>

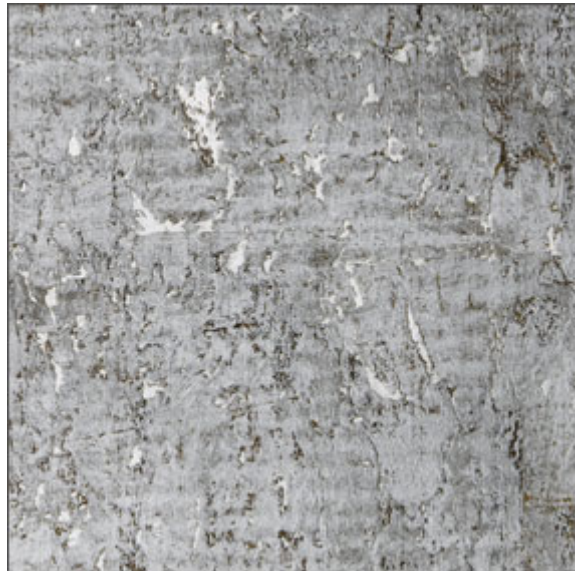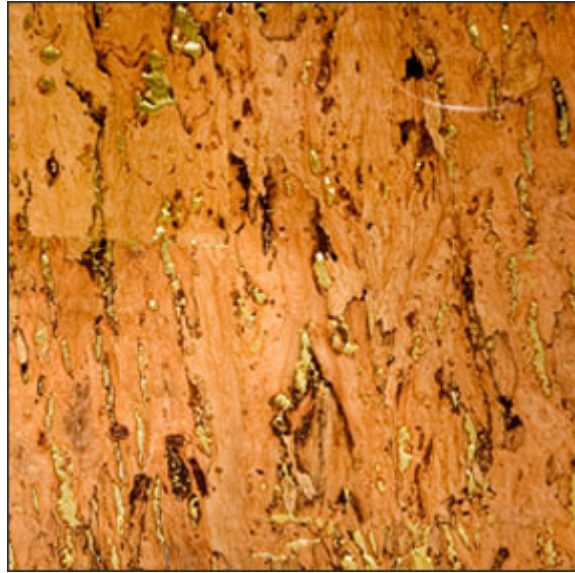

## Options:

Glass Type – Clear, Starphire or other colored glass

Glass Thickness – 3mm, 5mm, 10mm and 12.5mm options per lite. Other thicknesses on request

Panel size – Maximum width approximately 60", maximum height approximately 120" – final sizes to be confirmed per project.

Color of interlayer – May be changed on request and confirmation.

Livinglass

T: 949.369.1139  
F: 800.846.0245